



DPA UPScale™ ST Technical Specifications

DPA UPSCALE™ highlights at a glance

- DPA UPScale with Safe-Swap Modules (SSM)
For premium power protection availability
- Low total Cost of Ownership (TCO)
Cost saving during entire life-cycle
- Flexibility/Scalability
Ease of power upgrade, pay as you grow
- Enhanced Serviceability
Rapid fault recovery
- Link to Newavewatch™
Instantaneous fault recognition

Safe-Swap Modular Power Protection Power range: 10-120KW per rack

Specifications are subject to change without notice

TABLE OF CONTENTS

10.1 DPA UPScale ST SYSTEM DESCRIPTION 3

10.2 TECHNICAL CHARACTERISTICS 4

10.2.1 MECHANICAL CHARACTERISTICS FRAMES AND MODULES 4

10.3 INPUT CHARACTERISTICS 5

10.3.1 GRAPH: INPUT PF VERSUS % LOAD 6

10.3.2 GRAPH: INPUT DISTORTION THDI VERSUS % LOAD 6

10.4 BATTERY CHARACTERISTICS 7

10.5 OUTPUT CHARACTERISTICS 7

10.5.1 GRAPH: AC – AC EFFICIENCY with Linier load @ cosphi 1 8

10.5.2 GRAPH: Output Power in KW and KVA VERSUS cosphi 8

10.6 ENVIRONMENTAL CHARACTERISTICS 9

10.7 STANDARDS 9

10.8 COMMUNICATION 10

10.8.1 POWER MANAGEMENT DISPLAY (PMD) 10

10.8.2 MIMIC DIAGRAM 10

10.8.3 DISPLAY 10

10.8.4 CUSTOMER INTERFACES Terminals X1...X2 11

10.8.5 CUSTOMER INPUTS DRY PORT s: Terminal block X2 11

10.8.6 CUSTOMER OUTPUTS DRY PORTs : Terminal blocks X1 11

10.9 OPTIONS 12

10.9.1 MODEM/ETHERNET CARD / Newavewatch™ MANAGEMENT SOFTWARE 12

10.9.2 SNMP card / WaveMon Management Software 13

10.9.3 BATTERY CABINETS 13

10.10 BATTERY AUTONOMIES 14

10.10.1 Examples of Internal Battery Autonomy of DPA UPScale ST40 and ST 60 14

10.10.2 Examples of External Battery Autonomy 15

10.11 INSTALLATION PLANNING 16

10.11.1 HEAT DISSIPATION PER MODULE WITH NON-LINEAR LOAD 16

10.12 WIRING AND BLOCK DIAGRAMS FOR ALL FRAMES AND MODULES 17

10.12.1 TERMINAL CONNECTIONS OVERVIEW 17

10.12.2 SINGLE FEED INPUT 18

10.12.3 SINGLE FEED INPUT / Cable Sections 18

10.12.4 DUAL FEED INPUT 19

10.12.5 Dual FEED INPUT / Cable Sections 19

10.1 DPA UPScale ST SYSTEM DESCRIPTION

In environments that demand zero downtime, continuous power protection availability is essential. In order to respond to today’s dynamic IT and process-related environments that experience daily change through new server technologies, migration and centralization, resilient and easily adaptable power protection concepts are required.

DPA UPScale is the foundation for continuous power protection availability of network-critical infrastructures in enterprise data centers where business continuity has paramount importance and in process control environment where manufacturing continuity is essential.

NEWAVE DPA UPScale’s is a second generation high-power-density (HPD), leading-edge double-conversion power protection technology that has standardized on a modular component approach which helps speed deployment, improve adaptability and increase system availability while reducing total cost of ownership.

DPA UPScale’s is a unique on-demand architecture that integrates the power rack, power distribution unit, back-up battery rack and monitoring and management solutions to allow easy selection of optimized configurations.

DPA UPScale’s (Distributed Parallel Architecture) provides highest availability, unmatched flexibility and at the same time lowest cost of ownership in IT environments.

This Technical Specification provides detailed technical information on the mechanical, electrical and environmental performance of the DPA UPScale model types that can support to give answers to tender and end-user requirements. The DPA UPScale family was designed to respond to the most stringent safety, EMC and other important UPS standards. DPA UPScale family is offered in two types of solutions:

A) DPA UPScale ST is a rack-mounted modular design offering 4-types of Racks (Frames) types. This solution can accommodate 2 types of DPA UPScale Rack based Modules for a wide range of power requirements:

DPA UPScale ST (standard) frames:

- DPA UPScale ST 40 (40kW)
- DPA UPScale ST 60 (60kW)
- DPA UPScale ST 80 (80kW)
- DPA UPScale ST 120 (120kW)





DPA UPScale Modules types:

- UPScale M 10 (kW)
- UPScale M 20 (kW)

Key Features of DPA UPScale ST and DPA UPScale RI:

- | | |
|---|---|
| • Highest Availability
Modular, Decentralized Parallel Architecture (DPA) | <i>Near-zero down time</i> |
| • High Power Density (up to 272kW / m ²),
Small Footprint | <i>Space-saving of expensive floor space</i> |
| • Unity Output Power Factor
Full power for loads with unity PF | <i>No de-rating for loads with Unity PF</i> |
| • Highest Efficiency even with partial loads
Efficiency = 94.5 - 95.5% for loads 25-100%
(depending on Module power and type of load) | <i>Energy cost saving during UPS-life-cycle</i> |
| • Very low input current distortion THDi
THDi = < 3@ 100 % load | <i>Gen-set power and installation cost saving</i> |

10.2 TECHNICAL CHARACTERISTICS
10.2.1 MECHANICAL CHARACTERISTICS FRAMES AND MODULES

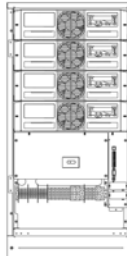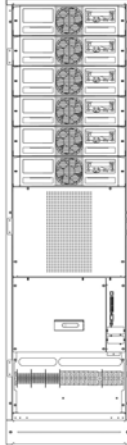DPA UPScale ST		UPSscale ST 40	UPSscale ST 60	UPSscale ST 80	UPSscale ST 120
DPA UPScale ST FRAMES					
Configuration accommodates:	Max.	2 module (10 or 20kW) and 80 x 7/9Ah batteries	3 modules (10 or 20kW) and 240 x 7/9Ah batteries	4 modules (10 or 20kW) and NO batteries	6 modules (10 or 20kW) and NO batteries
Max. Power connection	kW	40	60	80	120
Dimensions (WxHxD)	mm	550x1135x770	550x1975x770	550x1135x770	550x1975x770
Weight of Empty Frame w/o modules and w/o batteries	kg	92	173	82	133
Weight of Frame with modules and w/o batteries	kg	130 up to 136 (with 2 Module)	229 up to 238 (with 3 Module)	157up to 169 (with 4 Modules)	245 up to 263 (with 6 Modules)
Colours		Front : Graphite grey (Pulverlacke No. 4222903402 serie 09RCCAT1) Side walls: Graphite grey (Pulverlacke No. 4222903402 serie 09RCCAT1)			

MODULES		UPSscale M 10	UPSscale M 20
Output Active Rated Power	KW	10	20
Variable Number of 12V Battery Blocks	No.	20-50 *1)	30-50 *1)
Dimensions (WxHxD)	mm	488 x 132 x 540 (3 HU)	
Weight UPS Module	kg	18.6	21.5
Colors		Front : RAL 7016	


Note : * 1) Depending of the effective load in kW used by the module (see chapter 10.5 Battery characteristics)

10.3 INPUT CHARACTERISTICS

Module Range		UPScale M 10 or M 20	
Module Type		UPScale M 10	UPScale M 20
Output Rated Power per Module $\cos\phi$ 0.8	kVA	10	20
Output Rated Power per Module $\cos\phi$ 1.0	KW	10	20
Nominal Input Voltage	V	3x380/220V+N, 3x400V/230V+N, 3x415/240V+N	
Input Voltage Tolerance (ref to 3x400/230V) for Loads in %:	V	(-23%/+15%) 3x308/177 V to 3x460/264 V for <100 % load (-30%/+15%) 3x280/161 V to 3x460/264 V for < 80 % load (-40%/+15%) 3x240/138 V to 3x460/264 V for < 60 % load	
Input Frequency	Hz	35 – 70	
Input Power Factor		PF=0.99 @ 100 % load	
Inrush Current	A	max. In	
Input Distortion THDI		Sine-wave THDi = < 3 % @ 100% load	
Max. Input Power with rated output power and charged battery per Module (output $\cos\phi$ = 1.0)	kW	10.5	21
Max. Input Current with rated output power and charged battery per Module (output $\cos\phi$ = 1.0)	A	15.2	30.4
Max. Input Power with rated output power and discharged battery per Module (output $\cos\phi$ = 1.0)	kW	11.5	23
Max. Input Current with rated output power and discharged battery per Module (output $\cos\phi$ = 1.0)	A	16.6	33.3


10.3.1 GRAPH: INPUT PF VERSUS % LOAD

Input power factor versus load (Leading)

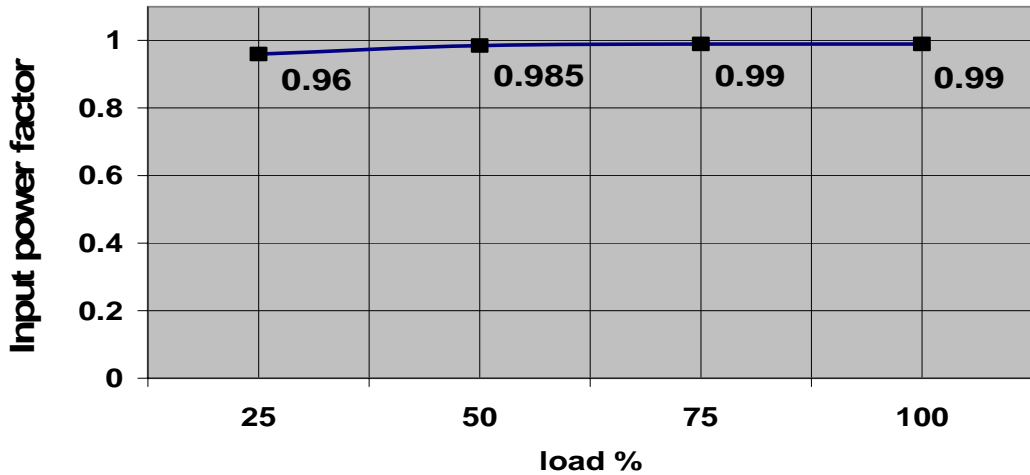

10.3.2 GRAPH: INPUT DISTORTION THDI VERSUS % LOAD

Input Current Distortion THDi

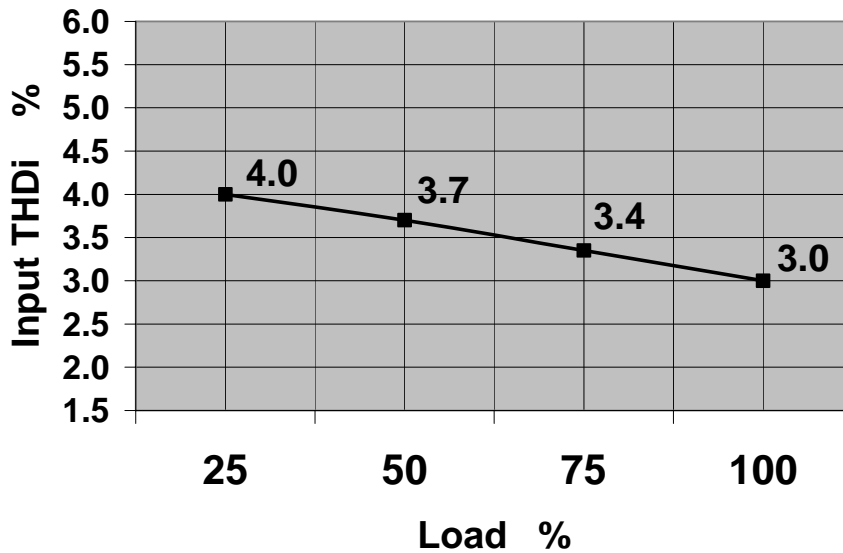

10.4 BATTERY CHARACTERISTICS

Module Range		UPScale M 10 or M 20	
Module Type		UPScale M 10	UPScale M 20
Variable Number of 12V Battery Blocks	No.	20-50 *1)	30-50 *1)
Maximum Battery Charger Current	A	4 A	4 A
Battery Charging Curve	Ripple free ; IU (DIN 41773)		
Temperature compensation	Standard (temp. sensor optional)		
Battery Test	Automatic and periodically (adjustable)		
Battery Type	Maintenance free VRLA or NiCd		

Note : * 1) Depending of the effective load in kW used by the module (see table below)


Description	UPScale Module M 10					UPScale Module M 20					
	20	24	28	30	34-50	30	34	36	40	40	48-50
Number of battery blocks	20	24	28	30	34-50	30	34	36	40	40	48-50
Max. Power in KW	6	8	8	10	10	12	12	16	20	16	20
Max. autonomy (min.)	5	5	5	5	999	5	999	5	5	999	999

10.5 OUTPUT CHARACTERISTICS


Module Range		UPScale M 10 or M 20	
Module Type		UPScale M 10	UPScale M 20
Output Rated Power per Module $\cos\phi$ 0.8	kVA	10	20
Output Rated Power per Module $\cos\phi$ 1.0	KW	10	20
Output Current In @ $\cos\phi$ 1.0 (400 V)	A	14.5	29
Output Rated Voltage	V	3x380/220V or 3x400/230V or 3x415/240V	
Output Voltage Stability	%	Static: < +/- 1% Dynamic (Step load 0%-100% or 100%-0%) < +/- 4%	
Output Voltage Distortion	%	With Linear Load < 1.5% With Non-linear Load (EN62040-3:2001) < 3%	
Output Frequency	Hz	50 Hz or 60 Hz	
Output Frequency Tolerance	%	Synchronized with mains < +/- 2% (selectable for bypass operation) or < +/- 4% Free running +/- 0.1%	
Bypass operation		At Nominal Input voltage of 3x400 V or 190 V to 264 V ph-N +/- 15%	
Permissible Unbalanced Load (All 3 phases regulated independently)	%	100%	
Phase Angle Tolerance (With 100 % Unbalanced load)	Deg.	+/- 0 deg.	
Overload Capability on Inverter	%	125 % load 10 min. 150 % load 60 sec.	
Output short capability (RMS)	A	Inverter : 3 x In during 200 ms Bypass : 10 x In during 20 ms	
Crest - Factor		3 : 1	

10.5.1 GRAPH: AC – AC EFFICIENCY with Linier load @ cosphi 1

Efficiency up to 1 % higher with output PF cosphi 0.8
 Details refer to paragraph 10.7 Environmental Characteristics

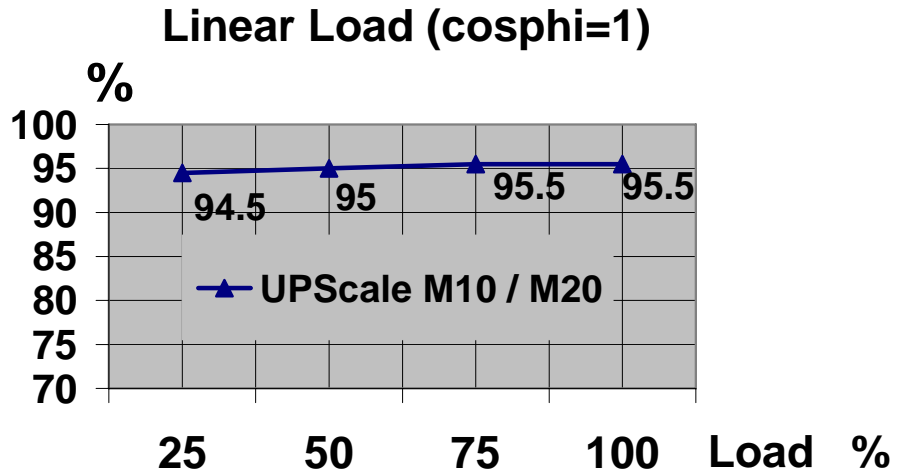

10.5.2 GRAPH: Output Power in KW and KVA VERSUS cosphi

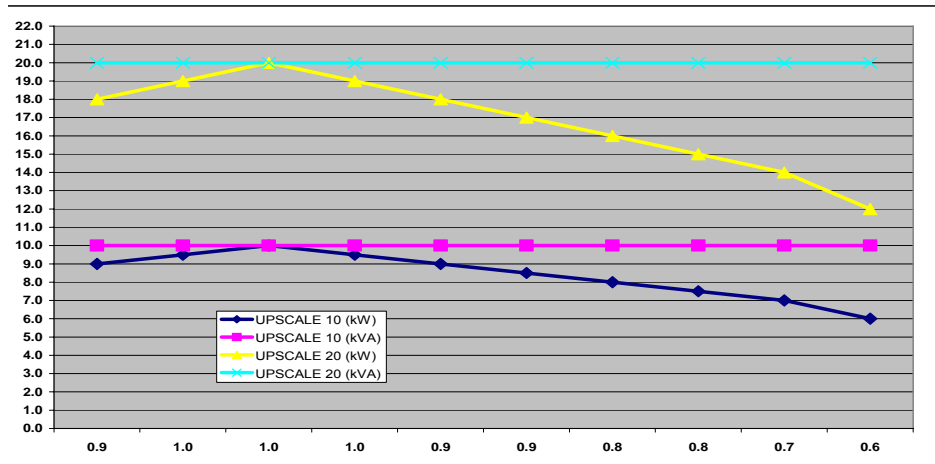

		UPScale Module		UPScale Module	
		M 10		M 20	
cosphi		kW	kVA	kW	kVA
	unity	0.9	9	10	18
0.95		9.5	10	19	20
1		10	10	20	20
Ind.	0.95	10	10	19	20
	0.9	9	10	18	20
	0.85	8.5	10	17	20
	0.8	8	10	16	20
	0.75	7.5	10	15	20
	0.7	7	10	14	20
	0.6	6	10	12	20

Changes of this table without notice – modifications reserved

10.6 ENVIRONMENTAL CHARACTERISTICS

Module Range		UPScale M 10 or M 20	
Module Type		UPScale M 10	UPScale M 20
Audible Noise with 100% / 50% Load	dBA	55 / 49	57 / 49
Operation temperature	°C	0 – 40	
Ambient Temperature for Batteries (recommended)	°C	20 – 25	
Storage Temperature	°C	-25 - +70	
Battery Storage Time at Ambient Temperature		Max. 6 months	
Max. altitude (above sea level)	m	1000m (3300ft) without de-rating	
De-rating factor for use at altitudes above 1000m sea level according (IEC 62040-3)		Meter above sea level (m / ft)	De-Rating Factor for Power
		1500 / 4850	0.95
		2000 / 6600	0.91
		2500 / 8250	0.86
		3000 / 9900	0.82
Relative Air-humidity		Max. 95% (non-condensing)	
Accessibility		Totally front accessibility for service and maintenance (no need for side, top or rear access)	
Positioning		Min. 20 cm rear space (required for fan)	
Input and Output Power Cabling		From the bottom on the front	
Efficiency AC-AC up to (at cosphi 1.0) (depending on Module power)	%	<i>Load</i> : 100 % 75 % 50% 25% M 20 : 95.5% 95.5% 95% 94.5% M 10 : 95.5% 95.5% 95% 94.5%	
Efficiency with Linear Load at cosphi =0.8 ind Efficiency Non-linear Load (EN 62040-1-1:2003)		Typically up to 1 % higher of above values Typically up to 1 % lower of above values	
Eco-Mode efficiency at 100% load	%	98 %	

10.7 STANDARDS

Safety	EN 62040-1-1, EN 60950-1	
Electromagnetic Compatibility	EN 61000-6-4 Prod.standard: EN 62040-2 EN 61000-6-2 Prod.standard: EN 62040-2 EN 61000-4-2, EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6	
EMC Classification for	M 10	M 20
Emission Class	C2	C2
Immunity Class	C3	C3
Performance	EN62040-3	
Product certification	CE	
Degree of protection	IP 20	

10.8 COMMUNICATION

Power Management Display (PMD)	1 LCD display for each module
RJ45 Plug (Not used)	RJ45 Plug (for future options)
Customer Interfaces : Outputs DRY PORT X 2	5 voltage free contacts For remote signaling and automatic computer shutdown
Customer Interfaces : Inputs DRY PORT X1	1 x Remote Shut down [EMERGENCY OFF (Normally closed)] 2 x Programmable Customer's Inputs (1 st default as GEN-ON (Normally open) (2 nd free Programmable Customer's Inputs (Normally open) 1 x Temp. Sensor for Battery Control 1 x 12 Vdc output (max. 200mA)
Serial ports RS232 on Sub-D9	1 x system frame For monitoring and integration in network management
USB	1x For monitoring and software management
Slot for SNMP	SNMP card (optional) For monitoring and integration in network management
Slot for Newwavewatch™	Newwavewatch™ card (optional) for Premium Power Protection

10.8.1 POWER MANAGEMENT DISPLAY (PMD)


The user-friendly PMD consists of three parts the MIMIC DIAGRAM, CONTROL KEYS and LCD that provides the necessary monitoring information about the UPS.

10.8.2 MIMIC DIAGRAM

The mimic diagram serves to give the general status of the UPS. The LED-indicators show the power flow status and in the event of mains failure or load transfer from inverter to bypass and vice-versa the corresponding LED-indicators will change color from green (normal) to red (warning). The LED's LINE 1 (rectifier) and LINE 2 (bypass) indicate the availability of the mains power supply. The LED's INVERTER and BYPASS if green indicate which of the two are supplying power to the critical load. When the LED-indicator BATTERY is lit it means that the battery due to mains failure is supplying the load. The LED-indicator ALARM is a visual indication of any internal or external alarm condition. At the same time the audible alarm will be activated.

10.8.3 DISPLAY

The 2 x 20 character LCD simplifies the communication with the UPS. The menu driven LCD enables the access to the EVENT REGISTER, or to monitor the input and output U, I, f, P, Autonomy Time and other Measurement's, to perform commands like start-up and shut-down of INVERTER or load transfer from INVERTER to BYPASS and vice-versa and finally it serves for the DIAGNOSIS (SERVICE MODE) for adjustments and testing (for more details see the USER MANUAL of DPA UPScale™).

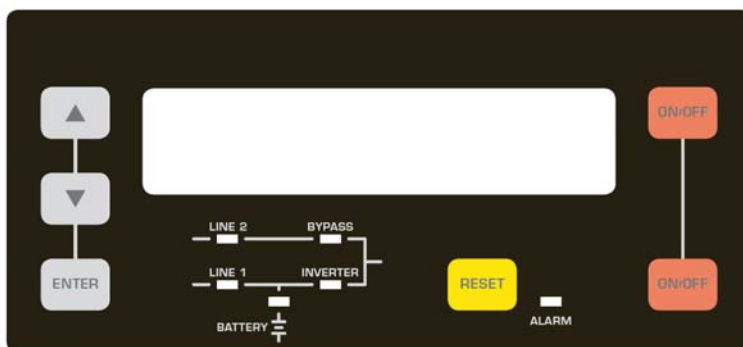

Power Management Display (PMD) of DPA UPScale™

10.8.4 CUSTOMER INTERFACES Terminals X1...X2


























10.8.5 CUSTOMER INPUTS DRY PORT s: Terminal block X2

Connection of Remote Shut down facilities, Generator Operation, Customers specials
(see UM Section 9 / OPTIONS)

10.8.6 CUSTOMER OUTPUTS DRY PORTs : Terminal blocks X1

Provision of signals for the automatic and orderly shutdown of servers, AS400 or Automation building systems

All voltage free contacts are rated 60 VAC max. and 500 mA max.:
All the interfaces are connected to Phoenix Spring terminals with wires : 0.5 mm2

Block	Terminal	Contact	Signal	On Display	Function
X2	X2 / 1	NO 	ALARM	MAINS_OK	Mains Present
	X2 / 2	NC 		Mains Failure	
	X2 / 3	C 		Common	
	X2 / 4	NO 	Message	LOAD_ON_INV	Load on Inverter
	X2 / 5	NC 		(Load on Mains bypass)	
	X2 / 6	C 		Common	
	X2 / 7	NO 	ALARM	BATT_LOW	Battery Low
	X2 / 8	NC 		Battery OK	
	X2 / 9	C 		Common	
	X2 / 10	NO 	Message	LOAD_ON_MAINS	Load on bypass (Mains)
	X2 / 11	NC 		(Load on Inverter)	
	X2 / 12	C 		Common	
	X2 / 13	NO 	ALARM	COMMON_ALARM	Common Alarm (System)
	X2 / 14	NC 		NO Alarm Condition	
	X2 / 15	C 		Common	
X1	X1 / 1	 IN	+ 12Vdc		Customer IN 1 (default as Generator Operation)
	X1 / 2	 GND	GND		(NC = Generator ON)
	X1 / 3	 IN	+ 12Vdc		Customer IN 2
	X1 / 4	 GND	GND		(Function on request, to be defined)
	X1 / 5	 IN	+ 3.3Vdc		Temperature Battery
	X1 / 6	 GND	GND		(If connected , the battery charger current if depending of the battery temp.)
	X1 / 7	 IN	+ 12Vdc		Remote Shut down
	X1 / 8	 GND	GND		(Do not remove the factory mounted bridge until external Remote Shut down is connected)
	X1 / 9	 IN	+ 12Vdc		12 Vdc source
	X1 / 10	 GND	GND		(max. 200 mA load)

Phoenix Spring Terminals (X1...X2) Connection

10.9 OPTIONS

- Modem/Ethernet card or Modem/GSM card for Newavewatch™ Management Software
- SNMP card and WaveMon Management Software , Modbus Protocol
- External Battery Cabinets
- In/Output Transformatore for special voltages on request
- Temp. sensor for battery temp. control

10.9.1 MODEM/ETHERNET CARD / Newavewatch™ MANAGEMENT SOFTWARE

Newavewatch™ is a redundant remote monitoring and management service which is a part of the Premium Power Protection Concept, providing you with peace-of-mind protection, knowing the mission critical facility is under careful, continuous watch 24/7/365. There are two different solution cards Modem/Ethernet or Modem/GSM to connect the UPS to the outside world.

Continuous monitoring is an affordable insurance policy to detect and warn before they become a crisis. **Acquire key performance parameter** and productivity information in real-time to empower you with the details needed to better understand machine performance and faster troubleshoot downtime events. **Early warning system**, so problems can be addressed before they become a real threat to the load. **Professional experts**, your virtual service technician onsite. **Total transparency** of information and actions performed like Notification of all critical status changes, Coordination of equipment service, Reporting of all alarms with priorities.

What are the features?


- Redundant and secure communication
- Alarm acknowledgment
- Priority driven Management (with escalation)

Comprehensive Management System

- Reception and management of alarm calls from UPS
- Storage of UPS Data in a database exportable in a CVS-format for easy handling in Excel
- Unlimited number of UPS that can be managed
- User administration with passwords and permission-level
- Administration of Log file
- Data logging with statistical analysis and diagnostics, report


Visualization of the UPS data:

- Current status (“single” and “parallel” operation)
- Measured values for single or three phase
- Recording function including graphs with zooming capabilities for selected measured values
- Display of event log file
- Display of UPS Parameters
- Web Server functionality, for data access from any Web Browser


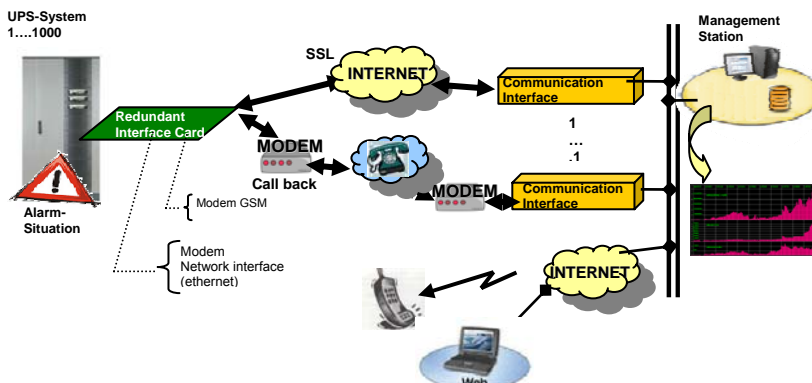


10.9.2 SNMP card / WaveMon Management Software

The Simple Network Management Protocol (SNMP) is a worldwide-standardized communication-protocol. It is used to monitor any device in the network via simple control language. The UPS-Management Software WaveMon also provides its data in this SNMP format with its internal software agent. The operating system you are using must support the SNMP protocol. We offer our WaveMon software with SNMP functionality for Novell, OS/2, all Windows running on INTEL and ALPHA, DEC VMS, Apple. Two types of SNMP interfaces with identical functionality are available: an external SNMP-Adapter (Box) and an internal SNMP-Card. Both can manage a parallel system (N modules) and return either global values - which are consistent for the whole parallel system - or specific values from the single modules.

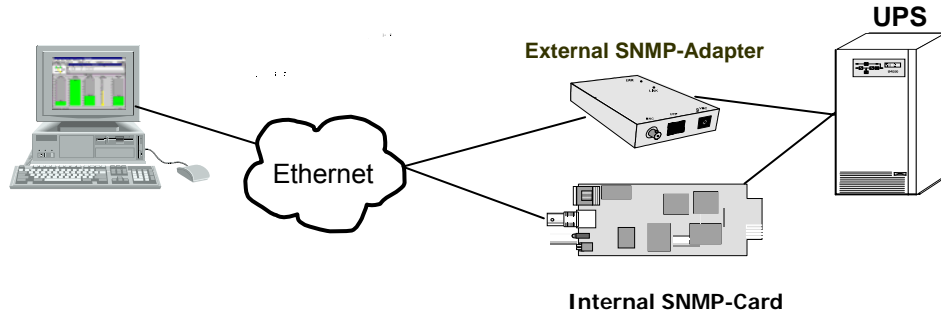

10.9.3 BATTERY CABINETS

S-type = For Separate. Battery C-type = For Common. Battery		CBAT-UPScale-120 S-type or C-type	CBAT-UPScale-200 S-type or C-type
BATTERY FRAMES			
Configuration accommodates:	Max.	120 Batt. block x 24Ah/28Ah on 8 shelf 3x5=15 blocks/shelf	200 Batt. blocks x 24Ah/28Ah on 7 shelf 6x5=30 blocks/shelf
Battery fuses / Max. Batt. Strings : Terminals :	S-type	9 / 9 (Terminal 9 x 16/25mm ²)	10 / 10 (Terminal 15 x 16/25mm ²)
Battery fuses / Max. Batt. Strings Terminals :	C-type	9 / 9 + Com. Connection Bar 3 x (2xM8) +PE 2xM8	10 / 10 + Com. Connection Bar 3 x (2xM10) +PE 2xM10
Fuse Type (Very Fast acting)	A	3x100 A	5x100A
Dimensions (WxHxD)	mm	730x1975x800	1200x1975x800
Weight with trays and w/o batteries	kg	290	410
Possible Battery configurations within the Battery Cabinets		Battery Configurations (1x40)x28Ah (2x40)x28Ah (3x40)x28Ah (2x50)x28Ah	Battery Configurations (1x40)x28Ah (2x40)x28Ah (3x40)x28Ah (4x40)x28Ah (5x40)x28Ah (2x50)x28Ah (4x50)x28Ah

10.10 BATTERY AUTONOMIES

10.10.1 Examples of Internal Battery Autonomy of DPA UPScale ST40 and ST 60

Module Type		UPScale M 10		UPScale M 20 Module need at least 48 blocks for full power or minimum 40 blocks for 16kW		
Internal Separate Battery configuration		Battery Autonomy in (min.) per Module				
Frame Type	Separate Battery / Module	8kW	10kW	12kW	16kW	20KW
UPScale ST 40 max. 80 blocks up to 2 modules	(1x40)x7Ah / Module	8	6	5		
UPScale ST 40 max. 80 blocks 1 modules ONLY	(1x50)x7Ah / Module	11	8.	7	4	
UPScale ST 60 max. 240 blocks up to 3 modules	(1x40)x7Ah / Module	8	6	5		
UPScale ST 60 max. 240 blocks up to 3 modules	(2x40)x7Ah / Module	21	15	12	8	5

Internal Common Battery configuration		Battery Autonomy in (min.) for Tot. System Power				
With 1 Module	Module Type	1 x UPScale M 10		1 x UPScale M 20		
	Total System Power	8kW	10kW	12kW	16kW	20KW
UPScale ST 40 or UPScale ST 60	1x (2x40)x7Ah	21	15	12	8	5
UPScale ST 60	2x (1x50)x7Ah	28	21	16	11	8
UPScale ST 60	3x (1x40)x7Ah	35	26	21	14	5
UPScale ST 60	3x (1x50)x7Ah	47	35	28	19	14
UPScale ST 60	4x (1x50)x7 Ah	69	52	41	28	21
UPScale ST 60	3x (2x40)x7Ah	88	66	52	35	5
With 2 Modules	Module Type	2 x UPScale M 10		2 x UPScale M 20		
	Total System Power	16kW	20kW	24kW	32KW	40kW
UPScale ST 40 or UPScale ST 60	1x (2x40)x7Ah	8	6	5		
UPScale ST 60	2x (1x50)x7Ah	11	8	7	4	
UPScale ST 60	3x (1x40)x7Ah	14	11	8	6	5
UPScale ST 60	3x (1x50)x7Ah	19	14	11	8	6
UPScale ST 60	4x (1x50)x7 Ah	28	21	16	11	8
UPScale ST 60	3x (2x40)x7Ah	35	26	21	14	5
With 3 Modules	Module Type	3 x UPScale M 10		3 x UPScale M 20		
	Total System Power	24kW	30KW	36kW	48KW	60kW
UPScale ST 60	2x (1x50)x7Ah	7	5	4		
UPScale ST 60	3x (1x40)x7Ah	8	6	5		
UPScale ST 60	2x (2x40)x7Ah	12	9	7	5	4
UPScale ST 60	4x (1x50)x7 Ah	16	12	10	7	5
UPScale ST 60	3x (2x40)x7Ah	21	15	12	8	5

10.10.2 Examples of External Battery Autonomy

This configuration are mostly used in combination with the frame UPScale ST 80 or ST 120

Module Type		UPScale M 10		UPScale M 20	
External Separate Battery configuration		Battery Autonomy in (min.) per Module			
Battery Cabinet	Battery / Module	1x UPScale M 10 (at 10 kW)		1 x UPScale M 20 (at 20kW)	
	Total System Power	8kW	10kW	16kW	20kW
1x CBAT--UPScale -120	1x40x28Ah	54	41	22	5
1x CBAT--UPScale -120	1x50x28Ah	72	54	30	22

External Common Battery configuration (with 40bl./string)		Battery Autonomy in (min.) for Tot. System Power (3+1)	
With 3 Modules	Module Type	3 x UPScale M 10	3 x UPScale M 20
	Total System Power	30 KW	48KW
1x CBAT-UPScale-120	(2x40)x28Ah	24	13
1x CBAT-UPScale-120	(3x40)x28Ah	41	22
1x CBAT-UPScale-200	(4x40)x28Ah	59	32
1x CBAT-UPScale-200	(5x40)x28Ah	78	43
External Common Battery configuration (with 50bl./string)		Battery Autonomy in (min.) for Tot. System Power (3+1)	
With 3 Modules	Total System Power	30 KW	60 KW
	Module Type		
1x CBAT-UPScale-120	(1x50)x28Ah	13	5
1x CBAT-UPScale-120	(2x50)x28Ah	32	13
1x CBAT-UPScale-200	(3x50)x28Ah	54	22
1x CBAT-UPScale-200	(4x50)x28Ah	78	32

External Common Battery configuration (with 40bl./string)		Battery Autonomy in (min.) for Tot. System Power (5+1)	
With 5 Modules	Module Type	5 x UPScale M 10	5 x UPScale M 20
	Total System Power	50 KW	80KW
1x CBAT-UPScale-120	(2x40)x28Ah	13	7
1x CBAT-UPScale-120	(3x40)x28Ah	21	12
1x CBAT-UPScale-200	(4x40)x28Ah	31	17
1x CBAT-UPScale-200	(5x40)x28Ah	41	22
External Common Battery configuration (with 50bl./string)		Battery Autonomy in (min.) for Tot. System Power (5+1)	
With 5 Modules	Total System Power	50 KW	100 KW
	Module Type		
1x CBAT-UPScale-120	(1x50)x28Ah	7	
1x CBAT-UPScale-120	(2x50)x28Ah	17	7
1x CBAT-UPScale-200	(3x50)x28Ah	28	12
1x CBAT-UPScale-200	(4x50)x28Ah	41	17

10.11 INSTALLATION PLANNING

Clearances	X	Y
Minimum	200mm	900 mm

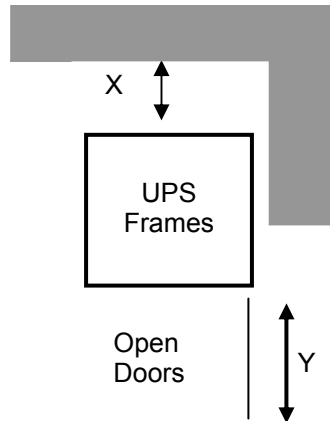


Figure 1: UPS space recommendation

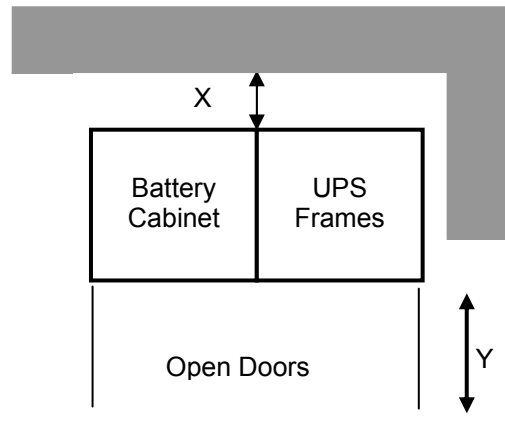


Figure 2 : : UPS + Battery space recommendation

UPS Frame type (40kW up to 120 kW)	UPScale ST 40	UPScale ST 60	UPScale ST 80	UPScale ST 120
Dimensions (WxHxD) mm	550x1135x770	550x1975x770	550x1135x770	550x1975x770
External Battery Cabinet Type	CBAT UPScale-120		CBAT UPScale-200	
Dimensions (WxHxD) mm	730x1975x800		1200x1975x800	
Accessibility	Totally front accessibility for service and maintenance (no need for side, top or rear access)			
Positioning	Min. 20 cm rear space (required for fan)			
Input and Output Power Cabling	From the bottom on the front			

10.11.1 HEAT DISSIPATION PER MODULE WITH NON-LINEAR LOAD

Module Range		UPScale M 10or M 20	
Module Type		UPScale M 10	UPScale M 20
Heat Dissipation with 100% Non-linear Load per Module (EN 62040-1-1:2003)	W	550	1100
Heat Dissipation with 100% Non-linear Load per Module (EN 62040-1-1:2003)	BTU/h	1887	3754
Airflow (25° - 30°C) with Non-linear Load per Module (EN 62040-1-1:2003)	m ³ /h	150	150
Dissipation at no load	W	120	150


10.12 WIRING AND BLOCK DIAGRAMS FOR ALL FRAMES AND MODULES

The customer has to supply the wiring to connect the UPS to the local power source. The installation inspection and initial start up of the UPS and extra battery cabinet must be carried out by a qualified service personnel such as a licensed service engineer from the manufacturer or from an agent authorized by the manufacturer. More details and procedure are mentioned in the user manual.


10.12.1 TERMINAL CONNECTIONS OVERVIEW

FRAME TYPE Terminals (T) Connection Bar (B)	Battery Earth PE	Separate. Battery (+ / N / -)	Common Battery (+ / N / -)	Input Bypass 3+N	Input Rectifier 3+N+PE	Output load 3+N+PE
UPScale ST 40	16/25mm ² (T)	2x (3 x 10/16mm ²) (T)	3 x M5 (B)	4 x 16/25 mm ² (T)	5 x 16/25 mm ² (T)	5 x 16/25 mm ² (T)
UPScale ST 60	50/70 mm ² (T)	3x (3 x 10/16mm ²) (T)	3 x M6 (B)	4 x 35/50 mm ² (T)	4 x 35/50 mm ² (T) +PE 50/70 mm ² (T)	4 x 35/50 mm ² (T) +PE 50/70 mm ² (T)
UPScale ST 80	50/70 mm ² (T)	4x (3 x 10/16mm ²) (T)	3 x M6 (B)	3 x 50/70 mm ² (T) + N 70/90 mm ² (T)	3 x 50/70 mm ² (T) + N 70/90 mm ² (T) +PE 50/70 mm ² (T)	3 x 50/70 mm ² (T) + N 70/90 mm ² (T) +PE 50/70 mm ² (T)
UPScale ST 120	50/70 mm ² (T)	6x (3 x 10/16mm ²) (T)	3 x 2xM5 (B) or 3 x M10 (B)	4 x 70/95mm ² (T)	4 x 70/95mm ² (T) +PE 50/70 mm ² (T)	4 x 70/95mm ² (T) +PE 50/70 mm ² (T)


UPScale ST 40

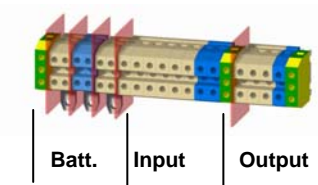


UPScale ST 60

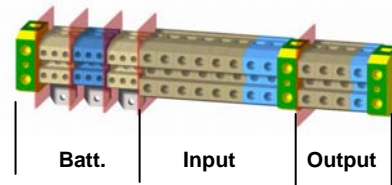

UPScale ST 80

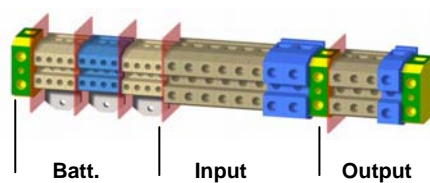


UPScale ST 120

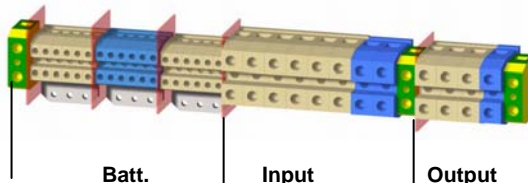

10.12.2 SINGLE FEED INPUT

Cable Sections and Fuse Ratings recommended. Alternatively, local standards to be respected

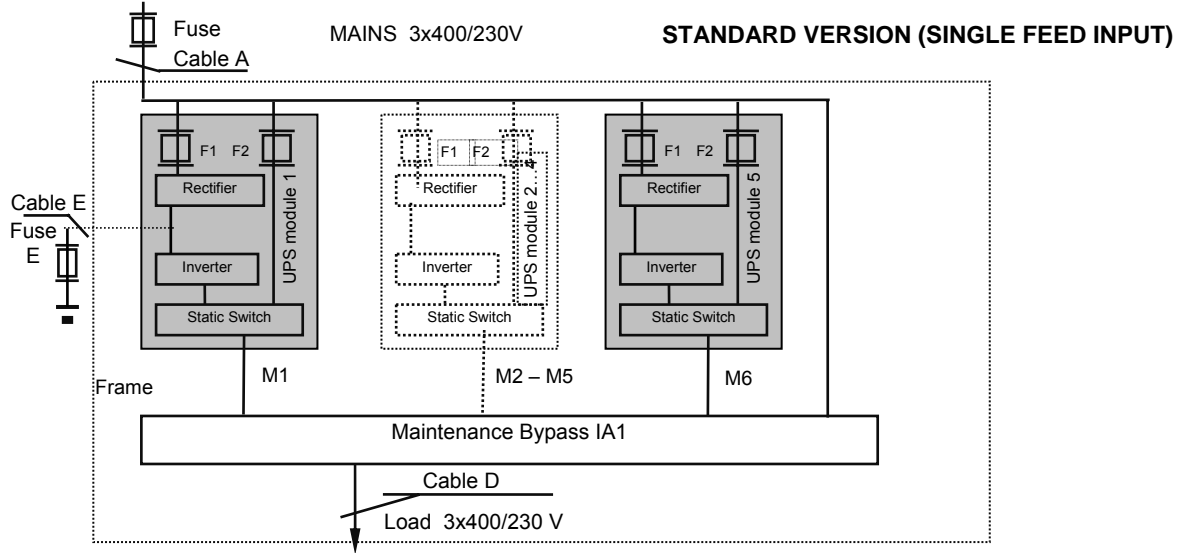


10.12.3 SINGLE FEED INPUT / Cable Sections

Frame type	Load in KW	Input 3x400V/230V			Output 3x400V230V @ cosphi 1.0		Battery		
		Fuse A (Agl/CB)	Cable A (mm ²) (IEC 60950-1:2001)	Max. Input Current with battery charging (A)	Cable D (mm ²) (IEC 60950-1:2001)	I nom (A)	Fuse E + / N / - (Agl/CB)	Cable E (mm ²) for CBAT UPScale 120 or 200 ONLY + / N / -	
								Com. Battery	Sep. Battery
UPSscale ST 40	40	3x80A	5x16	68	5x16	58 A	3x100A *1	3x25 *1	2x(3x10)
UPSscale ST 60	60	3x125A	5x35	102	5x35	87 A	3x160A*1	3x50 *1	3x (3x10)
UPSscale ST 80	80	3x160A	5x50	136	5x50	116 A	3x224A*1	3x95 *1	4x (3x25)
UPSscale ST120	120	3x224A	5x95	208	5x70	174 A	3x300A*1	3x150 *1	6x (3x25)

*1 only valid for common battery use

10.12.4 DUAL FEED INPUT

Cable Sections and Fuse Ratings recommended. Alternatively, local standards to be respected

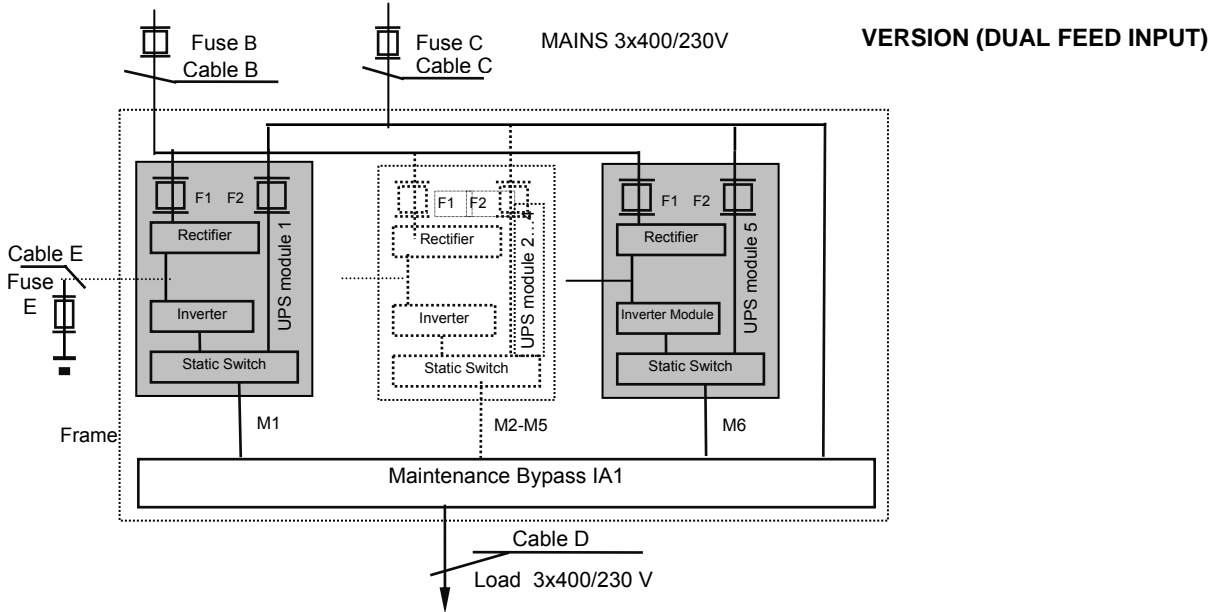

10.12.5 Dual FEED INPUT / Cable Sections

Frame type	Load in KW	Input 3x400V/230V			Bypass 3x400V/230V		Output 3x400V/230V @ cosphi 1.0		Battery		
		Fuse B (Agl/CB)	Cable B (mm ²) (IEC 60950-1:2001)	Max. Input Current with battery charging (A)	Fuse C (Agl/CB)	Cable C (mm ²) (IEC 60950-1:2001)	Cable D (mm ²) (IEC 60950-1:2001)	I nom	Fuse E +/N/- (Agl/CB)	Cable E (mm ²) for CBAT UPSscale 120 or 200 ONLY + / N / -	
										Com. Battery	Sep. Battery
UPSscale ST 40	40	3x80A	5x16	68	3x80A	4x16	5x16	58 A	3x100A *1	3x25 *1	2x(3x10)
UPSscale ST 60	60	3x125A	5x35	102	3x125A	4x35	5x35	87 A	3x160A*1	3x50 *1	3x(3x10)
UPSscale ST 80	80	3x160A	5x50	136	3x160A	4x50	5x50	116 A	3x224A*1	3x95 *1	4x(3x25)
UPSscale ST120	120	3x224A	5x95	208	3x224A	4x95	5x70	174 A	3x300A*1	3x150 *1	6x(3x25)

*1 only valid for common battery use



CONTACT INFORMATION

Newave Group Companies

Newave Energy Holding SA
Via Luserte Sud 9
6572 Quartino
Switzerland

Tel. +41 91 850 29 29
Fax +41 91 840 12 54
info@newave.ch
www.newaveups.com

Head office: Operations, Sales & Marketing

Newave SA
Via Luserte Sud 9
6572 Quartino
Switzerland

Tel. +41 91 850 29 29
Fax +41 91 840 12 54
info@newave.ch
www.newaveups.com

Subsidiaries

Austria

Newave Österreich GmbH
Ungargasse 36
A-1030 Wien
Österreich
Tel. +43 (1) 710 96 70 16
Fax +43 (1) 710 96 70 12
info@newaveups.at
www.newaveups.at

Brazil

Newave South America LTDA
Rua Clodomiro Amazonas No. 1422
Suite 68
BR-04537-002 - São Paulo
Tel. +55 11 3045 0809
Fax +55 11 3045 0764
info@newavesam.com
www.newaveups.com

Finland

Newave Finland OY
Niittyläntie 5 (postal)
Läkkisepänkuja 6 (visiting)
FIN-00620 Helsinki
Tel. +358 9 751 46 100
Fax +358 9 751 46 120
info@newaveups.fi
www.newaveups.fi

Germany

Newave USV Systeme GmbH
Summerside Ave. C 207
Baden Airpark
D-77836 Rheinmünster
Tel. +49 7229 1866-0
Fax +49 7229 1866-33
zentrale@newave-usv.de
www.newave-usv.de

Hong Kong & China

Newave Energy Hong Kong Ltd
Room 2506, West Tower, Shun Tak Centre
HK-168-200 Connaught Road Central
Tel. +31642215512
info@newave.cn.com

with branch office in China:

Newave Energy (Jiangmen) Limited
9/F Kawa House, 49 Jiangshe Road,
Jiangmen, GuangDong, China
Postal Code: 529000
Tel. +86 750 3680239
Fax +86 750 3680229
info@newave.cn.com
www.newave.com.cn

India

Newave Energy India Private Limited
102/103 Tanishka, Akurli Road,
Near Big Bazar, Kandivali East
IN-400 101 Mumbai
Tel. +91 (22) 42179292
Fax +91 (22) 42179200
rshah@absothermindia.com
www.newaveups.com

Italy

NEWAVE Italia
Via Vincenzo Ussani, 90
I-00151 Roma
Tel. +39 06 87451674
Fax. +39 06 39389924
newaveitalia@gmail.com
www.newaveups.it

Spain

Newave España SA
Arturo Soria 329 1 D
ES-28033 Madrid
Tel. +34 (91) 768 22 22
Fax +34 (91) 383 21 50
newave@newave.es
www.newave.es

Switzerland

ServiceNet AG
Industriestrasse 5
CH-5432 Neuenhof
Switzerland
Tel. +41 56 416 01 01
Fax +41 56 416 01 00
info@servicenet.ch
www.servicenet.ch

with branch office in Biel:

Am Wald 36
CH-2504 Biel
Switzerland
Tel. +41 32 366 60 30
Fax +41 32 366 60 35
biel@servicenet.ch

The Netherlands

Newave UPS Systems BV
Stephensonweg 9
NL-4207 HA Gorinchem
Tel. +31 183 64 6474
Fax +31 183 62 3540
info@newaveups.nl
www.newaveups.nl

Newave Certifications & Recognitions

